

APPLICATIONS

The SBA is a complete all-in-one submersible booster pump for pumping clean water, it is especially suitable for tank installations.

FEATURES & BENEFITS


- Intergrated control unit that starts and stops the pump on demand
- Fitted with float switch for dry-pump protection
- Fitted with 15m cable
- In-built thermal overload protection
- Stainless steel stainer

Preset pump pressure: 1.5bar

Pumped liquid: Clean, thin, non-aggressive and non-explosive liquids without solid particles or fibres.

Temperature: 0°C - 40°C

Max particle size: 1mm

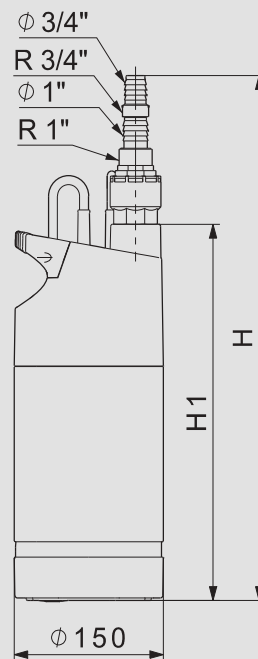

TECHNICAL DATA

Pump Type	Voltage [V]	Current [A]	kW	hp	Outlet	H mm	H1 mm	D mm	Weight [kg]
SBA 3-35	1 x 220-240	3.8	0.54	0.7	1"	621	528	150	9.2