

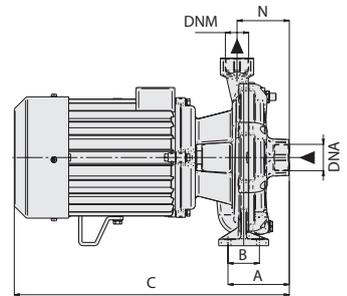
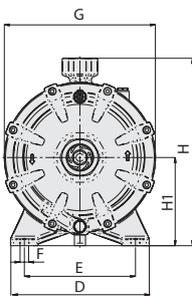
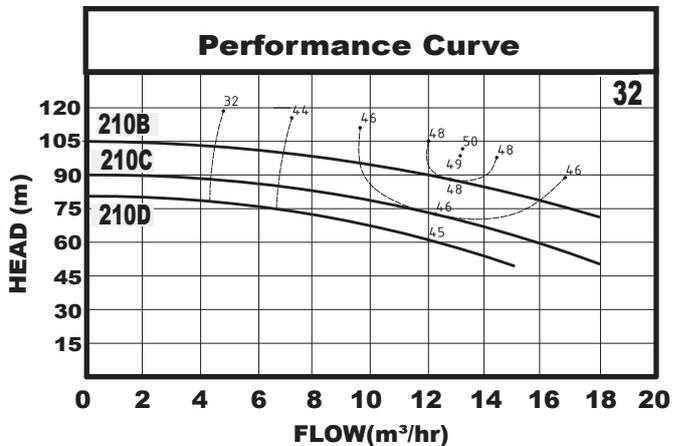


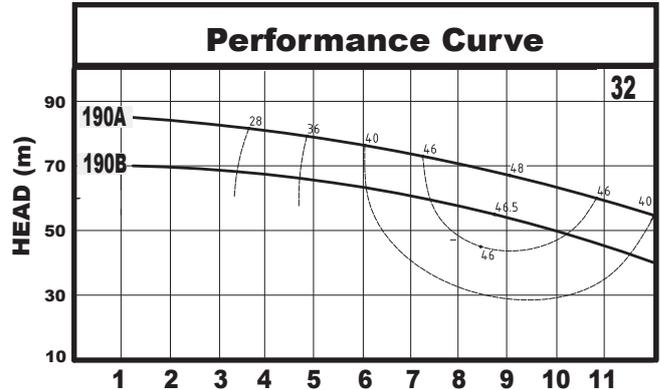

2CM Series

CENTRIFUGAL PUMPS

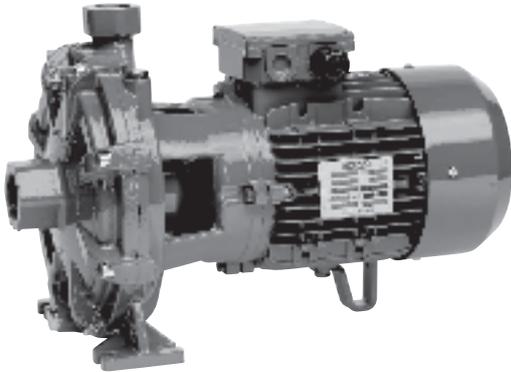

APPLICATIONS

Twin impeller centrifugal pumps designed for use in pressurized water supply systems, water transfer and irrigation.

CONSTRUCTION FEATURES

Cast Iron pump body and motor support, Brass or impeller and Carbon/Ceramic mechanical seal. Induction motor, closed and cooled with external ventilation, built in thermal and current overload protection.

Motor Protection: IP55

Insulation Class: F

Liquid Quality requirements: Clean, free of solids or abrasive substances, non-viscous, non-aggressive, non-crystallized, chemically neutral, close to the characteristics of water.

Temperature: - Up to 90°C

Maximum Operating Pressure: 12bar

TECHNICAL DATA

MODEL	POWER RATING			DIMENSIONS(MM)										INLET DNA	OUTLET DNM	WEIGHT KG
	Type	kW	HP	VOLTAGE	A	B	C	D	E	F	G	H	H1			
2CM32/190B	3	4	415	120	60	485	250	200	15	272	340	160	94	1 1/2"	1 1/4"	47
2CM32/190A	4	5.5		120	60	495	250	200	15	272	340	160	94	1 1/2"	1 1/4"	50
2CM32/210D	4	5.5		121	60	530	280	225	15	300	375	160	107	2"	1 1/4"	57
2CM32/210C	5.5	7.5		121	60	575	280	225	15	300	375	160	107	2"	1 1/4"	70.6
2CM32/210B	7.5	10		121	60	575	280	225	15	300	375	160	107	2"	1 1/4"	75.4