




## AQUABOOST TWIN

## 2CAM SERIES BOOSTER SET

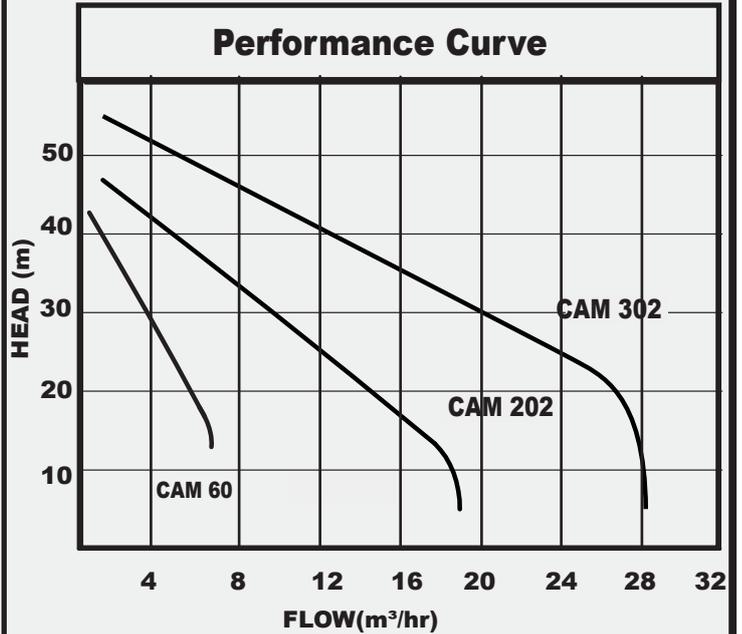

### APPLICATION & CONSTRUCTION FEATURES

The SPERONI 2CAM Booster sets make up the most reliable and economic compact fixed speed pressure water supply system. They incorporate two cast iron SPERONI self priming jet pumps assembled on base plate complete with manifolds, isolating valves, pressure tanks, pressure switches and pressure gauges

#### PRODUCT FEATURES Duty/assist operation:

The pumps are configured to run in a duty/assist operation. This means one pump will start on demand and the second pump will kick in if demand is not met by the first pump.

**Alternate starting function:** The sets are configured to start in an alternate sequence, which means both pumps will run equivalent amount of time

**Dry run protection:** The control panel incorporates a dry run function, which will cut out the pumps if water in the supply line is insufficient.

**Max. Ambient Temperature:** 40°C

**Liquid Temperature:** 0°C - 40°C

**Protection Rating:** IP54

### TECHNICAL DATA

MODEL	VOLTAGE V	POWER KW	INLET	OUTLET	L	W	H	WEIGHT KG
AQUABOOST TWIN 2CAM 60	240	0.6	1 1/2"		520	720	950	86
AQUABOOST TWIN 2CAM 202	240	1.5			520	720	950	88
AQUABOOST TWIN 2CAM 302	240	2.2			520	720	950	92