



# AQUABOOST TWIN

# 2RGXM BOOSTER SET



### APPLICATION & CONSTRUCTION FEATURES

The SPERONI 2RGXM Booster sets make up the most reliable and economic compact fixed speed pressure water supply system. They incorporate Two centrifugal pumps with cast iron suction and delivery housing, stainless steel impellers, diffusers, wearings and pump casing coupled to asynchronous two pole air cooled squirrel cage motor with inbuilt thermal overload protection. The pumps are designed for efficient and dependable performance and a long & trouble free life

#### PRODUCT FEATURES Duty/assist operation:

The pumps are configured to run in a duty/assist operation. This means one pump will start on demand and the second pump will kick in if demand is not met by the first pump.


**Alternate starting function:** The sets are configured to start in an alternate sequence, which means both pumps will run equivalent amount of time

**Dry run protection:** The control panel incorporates a dry run function, which will cut out the pumps if water in the supply line is insufficient.

**Max. Ambient Temperature:** 40°C

**Liquid Temperature:** 0°C - 40°C

**Protection Rating:** IP54

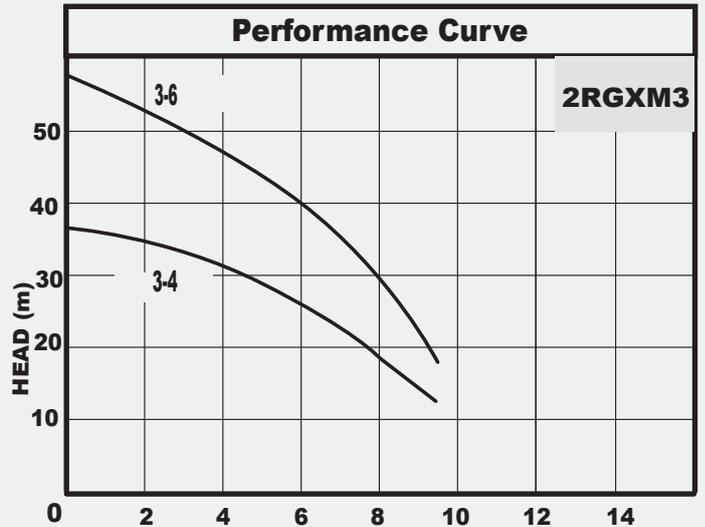

### TECHNICAL DATA

MODEL	VOLTAGE V	POWER KW	INLET	OUTLET	L	W	H	WEIGHT KG
AQUABOOST TWIN 2RGXM 3-4	240	0.55	11/2"		520	720	950	45
AQUABOOST TWIN 2RGXM 3-6	240	0.75			520	720	950	47
AQUABOOST TWIN 2RGXM 5-4	240	0.75			520	720	950	47
AQUABOOST TWIN 2RGXM 5-5	240	1.1			520	720	950	51