



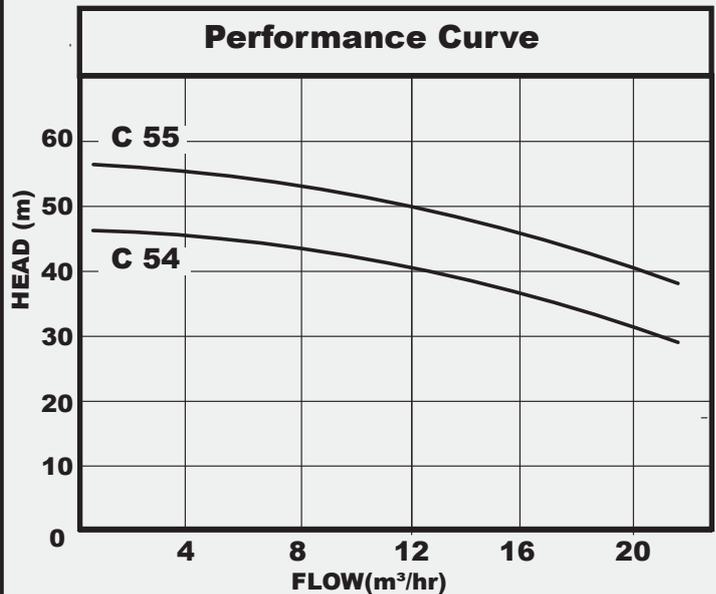

C Series

CENTRIFUGAL PUMPS

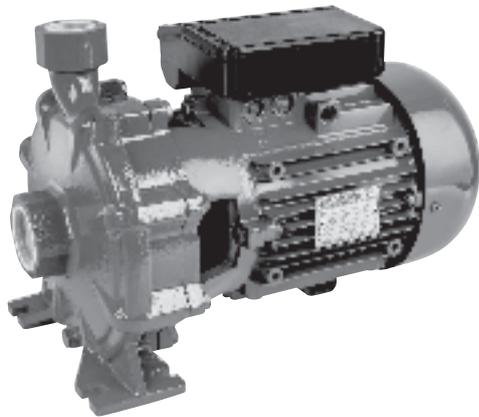

APPLICATIONS

Single impeller centrifugal pumps designed for use in pressurized water supply systems, water transfer and irrigation.

CONSTRUCTION FEATURES

Cast Iron pump body and motor support, Technopolymer or castiron (see datasheet) impeller and Carbon/Ceramic mechanical seal. Induction motor, closed and cooled with external ventilation, built in thermal and current overload protection.

Motor Protection: IP55


Terminal box Protection: IP55

Insulation Class: F

Liquid Quality requirements: Clean, free of solids or abrasive substances, non-viscous, non-aggressive, non-crystallized, chemically neutral, close to the characteristics of water.

Temperature: -15°C to 110°C

Maximum Operating Pressure: 10bar

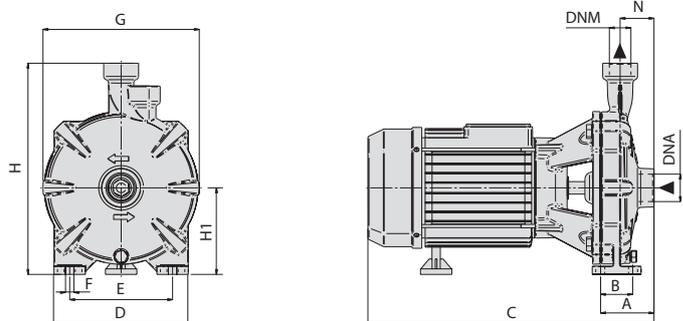

TECHNICAL DATA

MODEL	POWER RATING			DIMENSIONS(MM)										INLET DNA	OUTLET DNM	WEIGHT KG
	kW	HP	VOLTAGE	A	B	C	D	E	F	G	H	H1	N			
C 54	3	4	415	88,5	60	485	245	190	14	256	323	132	58,5	2"	1"4	50.5
C 55	4	5.5	240	88,5	60	475	245	190	14	256	323	132	58,5	2"	1" 4	51.1