



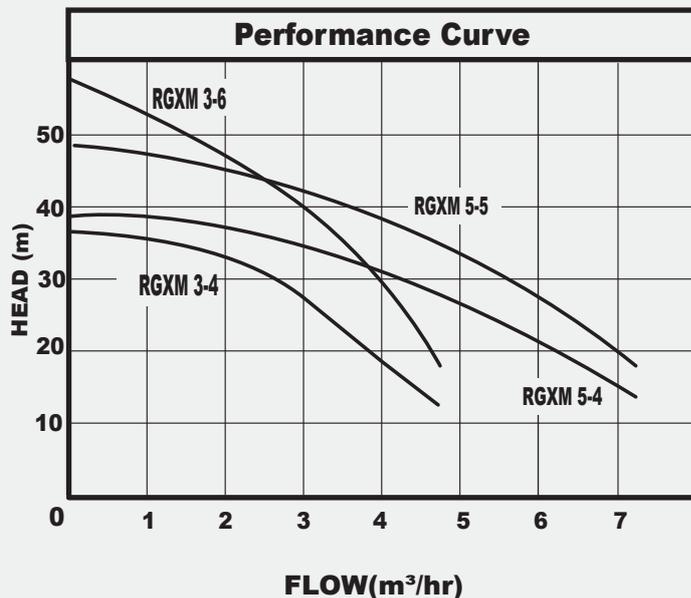

RGXM Series

CENTRIFUGAL PUMPS

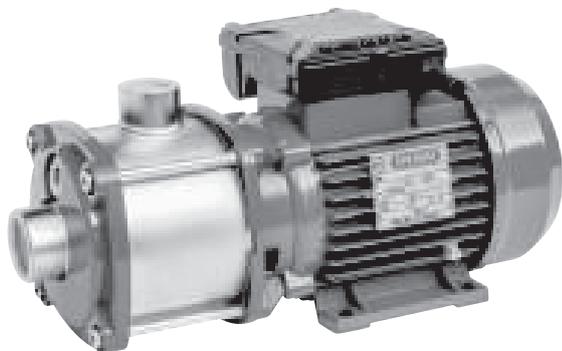

APPLICATIONS

Designed to cover a wide range of applications, ranging from small domestic installations to large industrial systems.


CONSTRUCTION FEATURES

Compact design with pump and motor close coupled. single phase motors are fitted with thermal overload protection. Axial suction and radial discharge ports. Front housing made of cast iron and impellers made of 304 stainless steel pump mounted on a base plate for ease of installation.

Pump liquids: Clean, thin, non-aggressive liquids without solid particles and fibre.

Liquid Temperature: 0°C to 90°C

Max Operating Pressure: 5bar

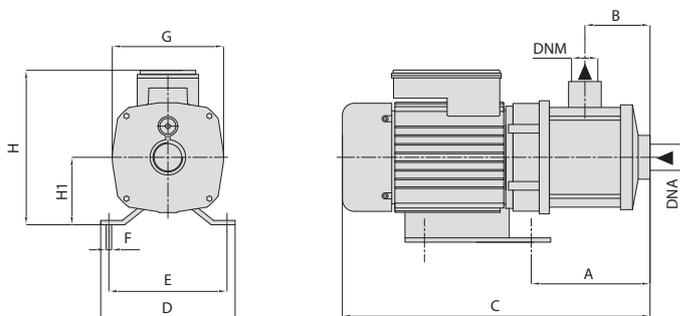

TECHNICAL DATA

MODEL	POWER RATING			DIMENSIONS(MM)									INLET DNA	OUTLET DNM	WEIGHT KG
	Type	kW	HP	VOLTAGE	A	B	C	D	E	F	G	H			
RGXM 3-4	0.55	0.75	240	149	90	365	158	125	11	140	187	75	1"	1"	9.4
RGXM 3-6	0.75	1	240	203	144	416	158	125	11	140	200	75	1"	1"	11.2
RGXM 5-4	0.75	1	240	149	90	362	158	125	11	140	200	75	1"4	1"	10.7
RGXM 5-5	1.1	1.5	240	167	108	380	158	125	11	140	200	75	1"4	1"	11.9