




SS6A SERIES BOREHOLE PUMPS



Performance Curves

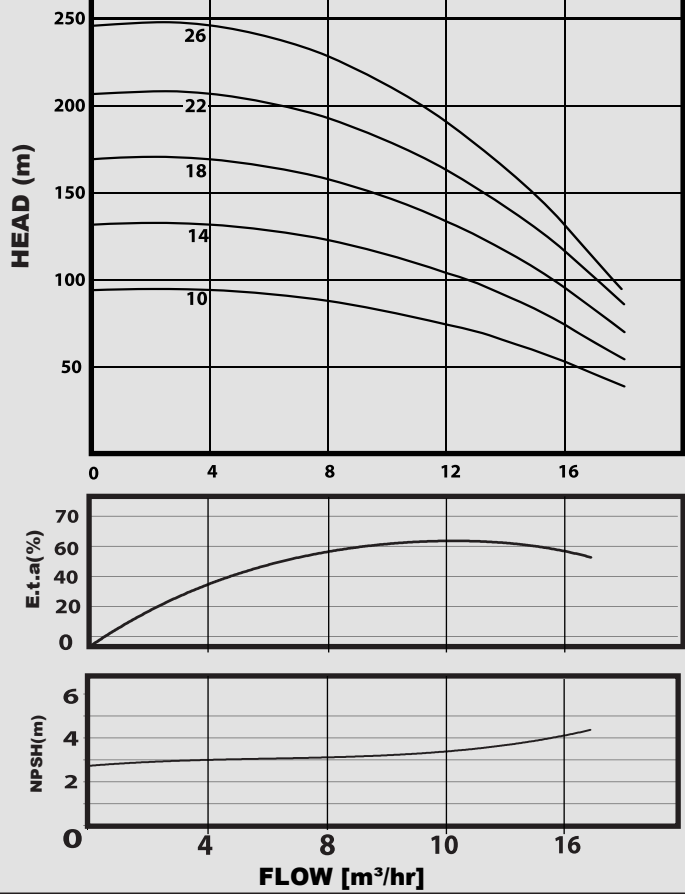

APPLICATIONS

The DAB SS pumps are designed for borehole installations as well as lifting, distribution and pressurization applications.


CONSTRUCTION FEATURES

Diffusers, Impellers, Brackets, Suction case and Discharge case completely made of stainless steel AISI 304 in order to provide maximum strength, durability, wear and tear resistance.

Max. Permissible Sand/Silt: 50g/m³

Max. Ambient Temperature: 30°C

Installation: Horizontal or vertical

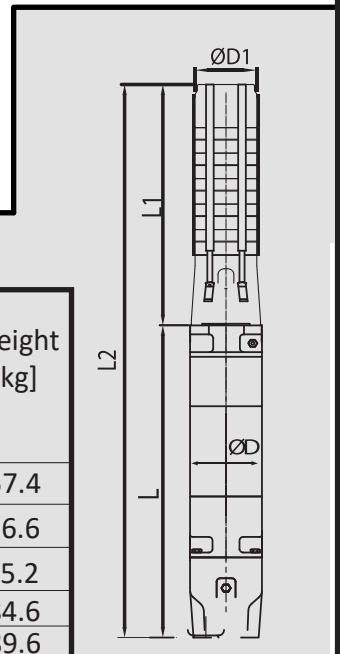

TECHNICAL DATA

Model	Motor Type	Electrical Data			L2 [mm]	L [mm]	L1 [mm]	D [mm]	D1 [mm]	Outlet	Weight [kg]
		P2 Nominal		In A							
		[kW]	[HP]								
SS6A/10	6GF	4	5.5	10.6	1474	600	874	141	132	2 1/2"	57.4
SS6A/14	6GF	5.5	7.5	14	1747	631	1116				66.6
SS6A/18	6GF	7.5	10	18	2018	660	1358				75.2
SS6A/22	6GF	9.2	12.5	22	2285	685	1600				84.6
SS6A/26	6GF	9.2	12.5	22	2527	685	1842				89.6