


TAFLO

AQUABOOST TWIN

2CPM158 BOOSTER SET

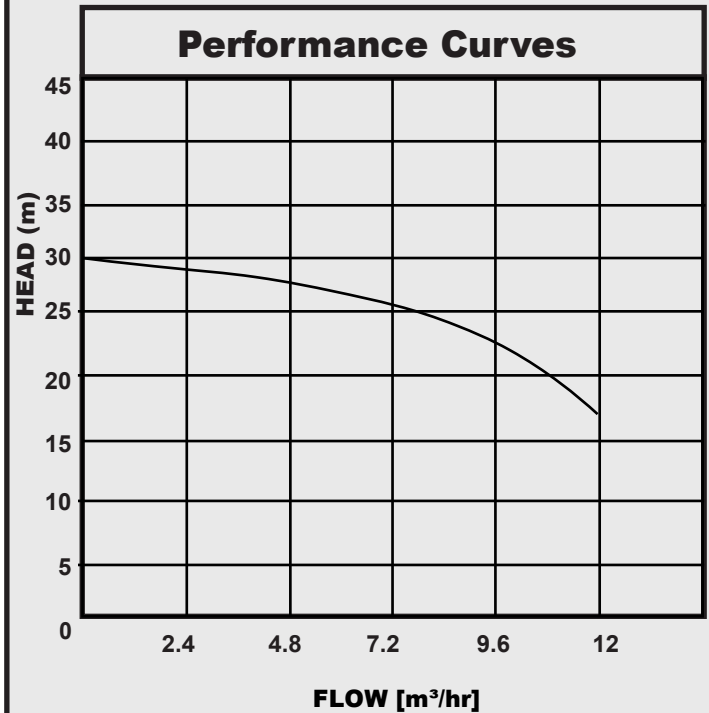

APPLICATION & CONSTRUCTION FEATURES

The TAFLO AQUABOOST 2CPM158 Booster set make up the most reliable and economic compact fixed speed pressure water supply system. They incorporate two cast iron single impeller centrifugal pumps assembled on base plate complete with manifolds, isolating valves, pressure tanks, pressure switches and pressure gauges

PRODUCT FEATURES

Duty/assist operation: The pumps are configured to run in a duty/assist operation. This means one pump will start on demand and the second pump will kick in if demand is not met by the first pump.

Alternate starting function: The sets are configured to start in an alternate sequence, which means both pumps will run equivalent amount of time.

Dry run protection: The control panel incorporates a dry run function, which will cut out the pumps if water in the supply line is insufficient.

Max. Ambient Temperature: 40° C

Liquid Temperature: 0° C to 40° C

Protection Rating: IP54

TECHNICAL DATA

MODEL	VOLTAGE V	POWER KW	INLET	OUTLET	L	W	H	WEIGHT (KG)
2CPM158	240V	0.75	1 1/2"	1 1/2"	520	460	950	47.9