

TAFLO

AQUABOOST TWIN

2CVP BOOSTER SET



APPLICATION & CONSTRUCTION FEATURES

The TAFLO AQUABOOST 2CVP booster set make up the most reliable and economic compact fixed speed pressure water supply system. They incorporate Two centrifugal pumps with cast iron suction, delivery housing, stainless steel impellers, difusers, wearings and pump casing coupled to asynchronous two pole air cooled squirrel cage motor with inbuilt thermal overload protection. The pumps are designed for efficient and dependable performance and a long and trouble free life

PRODUCT FEATURES

Duty/assist operation: The pumps are configured to run in a duty/assist operation. This means one pump will start on demand and the second pump will kick in if demand is not met by the first pump.

Alternate starting function: The sets are configured to start in an alternate sequence, which means both pumps will run equivalent amount of time.



Dry run protection: The control panel incorporates a dry run function, which will cut out the pumps if water in the supply line is insufficient.

Max. Ambient Temperature: 40° C

Liquid Temperature: 0° C to 40° C

Protection Rating: IP54

TECHNICAL DATA

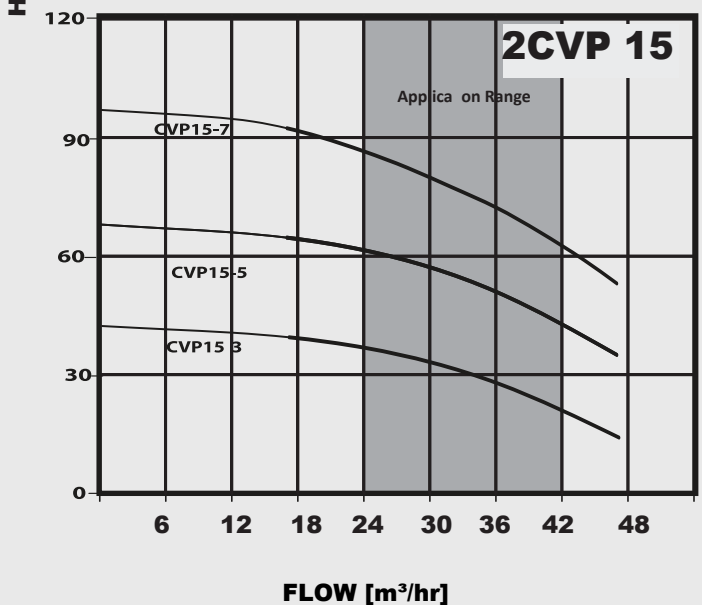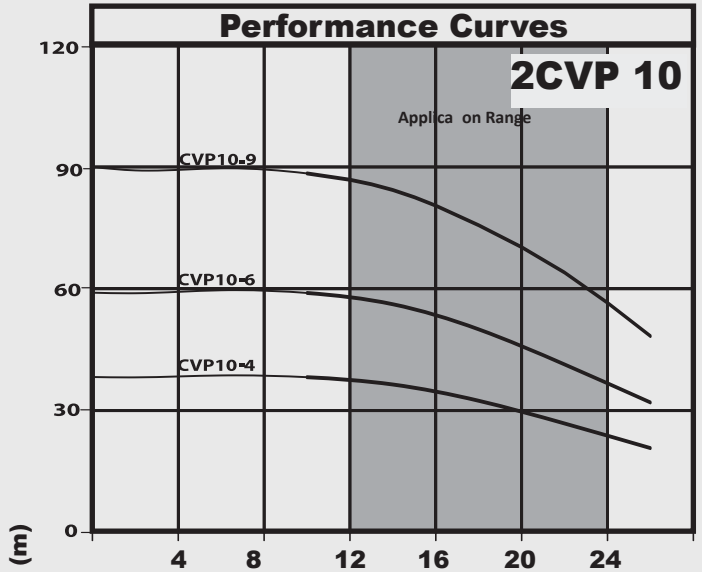

MODEL	VOLTAGE V	POWER KW	INLET	OUTLET	L	W	H	WEIGHT (KG)
2CVP10-4	415	1.5	2"		600	660	760	111
2CVP10-6		2.2			600	660	820	115
2CVP10-9		3			600	660	840	135
2CVP15-3	415	3	3"		600	660	815	127
2CVP15-5		4			600	660	915	139
2CVP15-7		5.5			600	660	1037	206