


# TAFLO

## BPS17

## BOREHOLE PUMPS



### Performance Curves

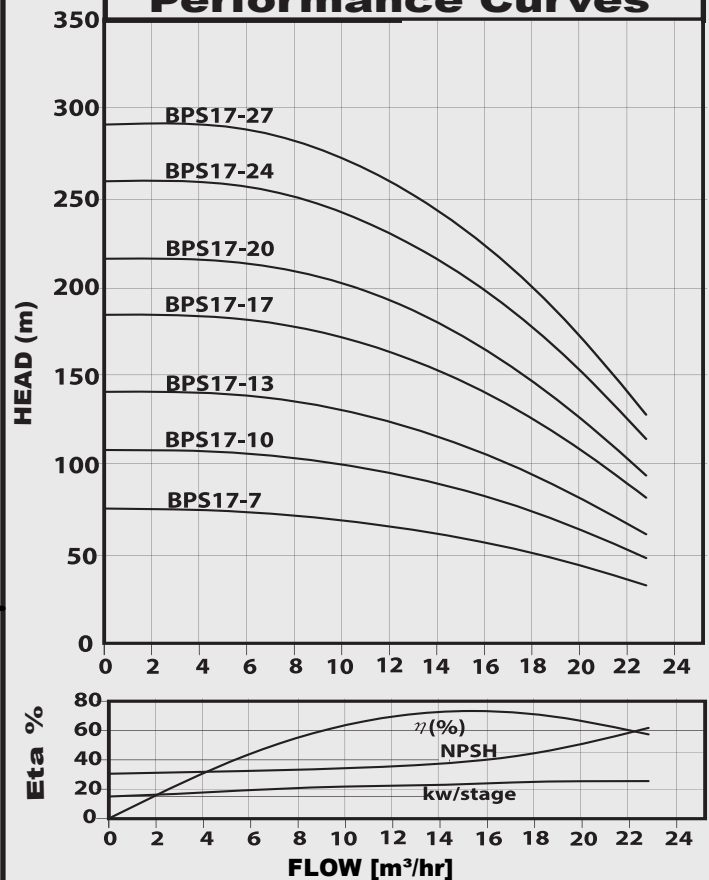

### APPLICATIONS

The TAFLO BPS pumps are specially for Borehole installations and are also suitable for pressure boosting, agriculture and fountain applications

### CONSTRUCTION FEATURES


Stainless steel centrifugal submersible pump coupled to asynchronous two pole air cooled submersible oil filled motor made in AISI 304 stainless steel for parts in contact with water. The pumps are designed for efficient and dependable performance and a long and trouble-free life.

**PUMPED LIQUIDS:** Clean, thin, non-aggressive liquids without solid particles and fibre.

**LIQUID TEMPERATURE:** Maximum 30°C

**MAX. INSTALLATION DEPTH:** below water -250m

**SAND CONTENT:** 50g/m<sup>3</sup>

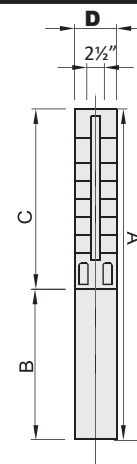

### TECHNICAL DATA

Pump Type	kW	HP	Full Load Current	Dimensions(mm)				Weight (kg) Pump
				A	B	C	D	
				415V				
BPS17-7	4.0	5.5	10.2	1320	614	706	131	36.7
BPS17-10	5.5	7.5	13.1	1571	631	887	131	44
BPS17-13	7.5	10	16.9	1833	660	1069	142	53
BPS17-17	9.2	12.5	22.8	1996	685	1311	142	77
BPS17-20	11	15	26	2222	730	1492	142	85
BPS17-24	15	20	34.2	2519	785	1734	142	97
BPS17-27	18.5	25	34.2	2701	785	1916	142	102