


# TAFLO

## BPS30

## BOREHOLE PUMPS

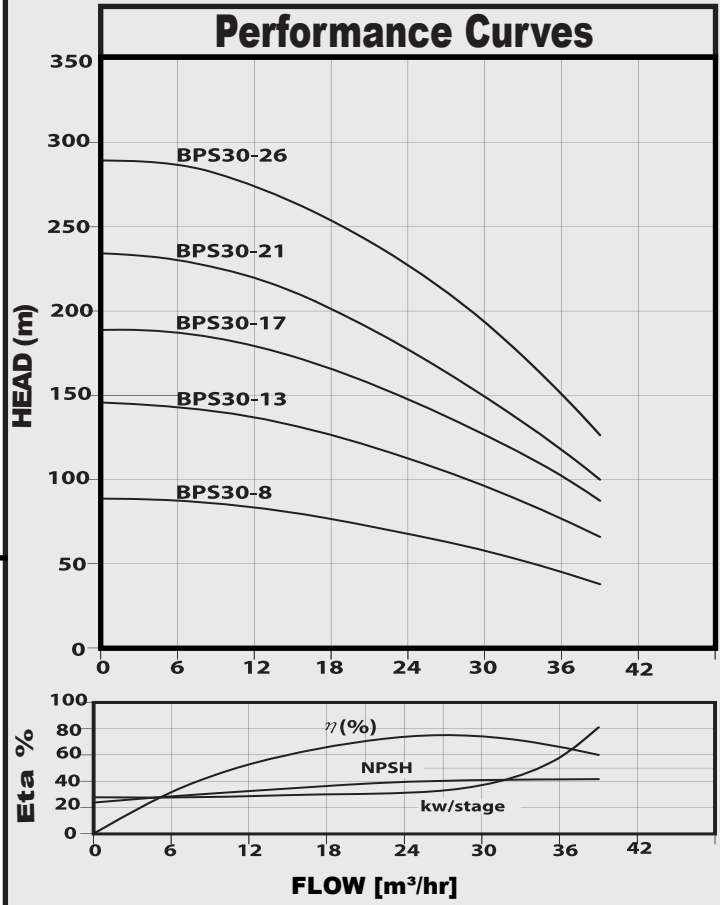

### APPLICATIONS

The TAFLO BPS pumps are specially for Borehole installations and are also suitable for pressure boosting, agriculture and fountain applications

### CONSTRUCTION FEATURES

Stainless steel centrifugal submersible pump coupled to asynchronous two pole air cooled submersible oil filled motor made in AISI 304 stainless steel for parts in contact with water. The pumps are designed for efficient and dependable performance and a long and trouble-free life.


**PUMPED LIQUIDS:** Clean, thin, non-aggressive liquids without solid particles and fibre.

**LIQUID TEMPERATURE:** Maximum 30°C

**MAX. INSTALLATION DEPTH:** below water -250m

**SAND CONTENT:** 50g/m<sup>3</sup>

### TECHNICAL DATA



Pump Type	kW	HP	Full Load Current	Dimensions(mm)			Weight (kg)
				A	B	C	
BPS30-8	7.5	10	16.5	1816	778	1038	49
BPS30-13	11	15	25.5	2248	730	1518	80
BPS30-17	15	20	33.4	2687	785	1902	93
BPS30-21	18.5	25	41	3146	860	2286	107
BPS30-26	22	30	47	3686	920	2766	122