

TAFLO

**CMF 2
CMF 4
CMF 8
SERIES**

**HORIZONTAL
MULTI-STAGE PUMPS**



APPLICATIONS

The TAFLO CMF range are horizontal design multi-stage pumps suitable for pressure boosting, water transfer and agriculture applications.

CONSTRUCTION FEATURES

Robust stainless steel pump casing, stainless steel impellers, diffusers and wearings, coupled to asynchronous two pole air cooled squirrel cage motor with inbuilt thermal overload protection. The pumps are designed for efficient and dependable performance and a long and trouble free life

PUMPED LIQUIDS: Clean, thin, non-aggressive liquids without solid particles




LIQUID TEMPERATURE: Maximum -20°C to +70°C

ENCLOSURE CLASS: IP54

INSULATION CLASS: F

RPM: 2850

Performance Curves

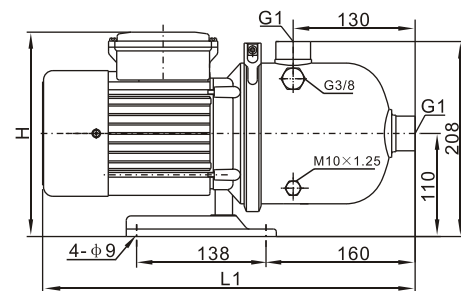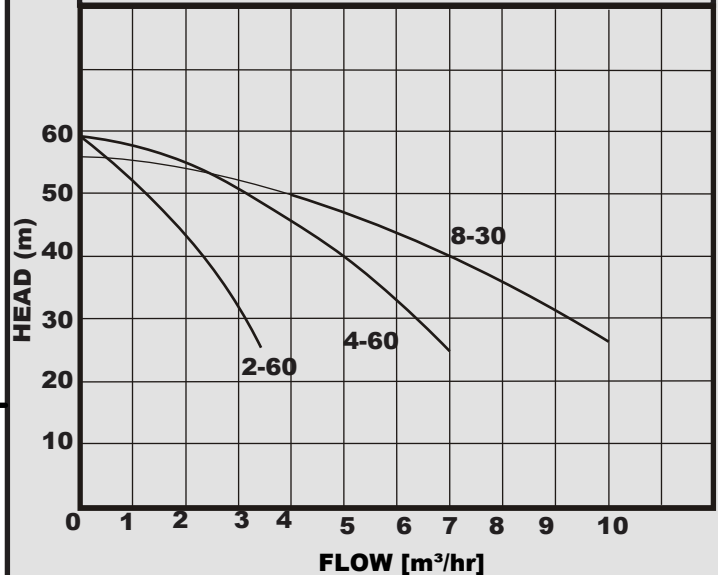

TECHNICAL DATA

MODEL	kW	VOLTAGE	DIMENSIONS		INLET	OUTLET	WEIGHT (KG)
		SINGLE PHASE	L1	H			
CMF2-60	0.75	240	400	217	G1"	G1"	12
CMF4-60	1.1	240	400	217	G1 1/4"	G1"	13.5
CMF8-30	1.85	240	500	239	G1 1/2"	G1"	21.5