

TAFLO

CMI 16 SERIES

HORIZONTAL MULTI-STAGE PUMPS



APPLICATIONS

The TAFLO CMI range are horizontal design multi-stage pumps suitable for pressure boosting, water transfer and agriculture applications.

CONSTRUCTION FEATURES

Robust stainless steel pump casing, stainless steel impellers, diffusers and wearings, coupled to asynchronous two pole air cooled squirrel cage motor with inbuilt thermal overload protection. The pumps are designed for efficient and dependable performance and a long and trouble free life




PUMPED LIQUIDS: Clean, thin, non-aggressive liquids without solid particles

LIQUID TEMPERATURE: Maximum -20°C to +70°C

ENCLOSURE CLASS: IP54

INSULATION CLASS: F

RPM: 2850

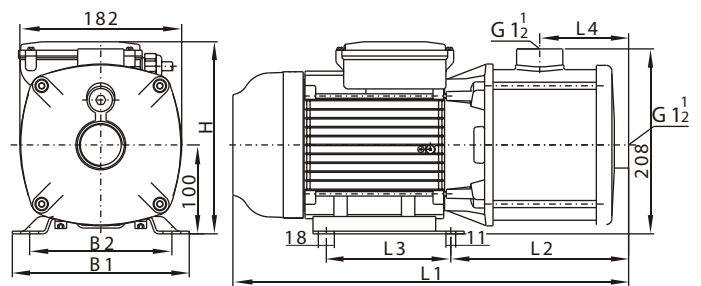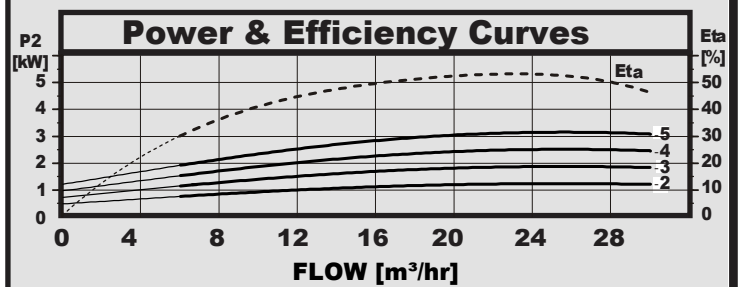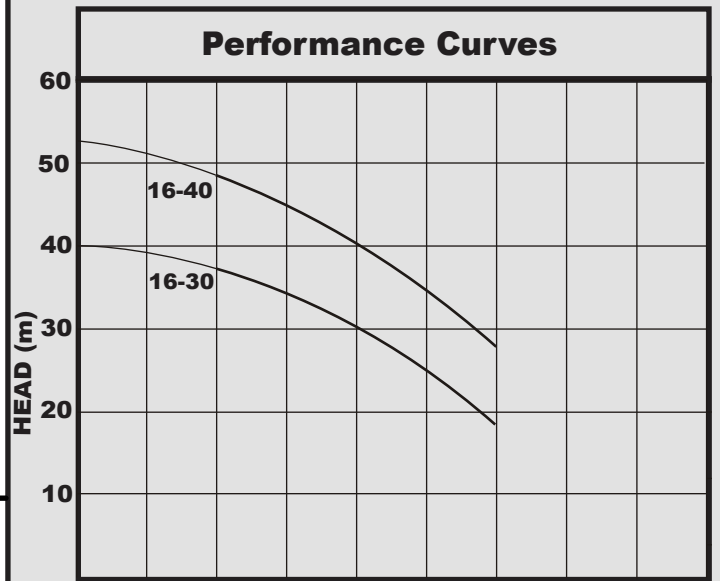

TECHNICAL DATA

MODEL	kW	VOLTAGE					DIMENSIONS (mm)		INLET	OUTLET	WEIGHT (KG)
		THREE PHASE					L2	L4			
		B1	B2	L1	L3	H					
CMI16-30	2.2	199	160	580	140	212	230	130	G11/2"	G11/2"	22
CMI16-40	3	199	160	545	140	212	275	175	G11/2"	G11/2"	27