

TAFLO

CMI 5 SERIES

HORIZONTAL MULTI-STAGE PUMPS



APPLICATIONS

The TAFLO CMI range are horizontal design multi-stage pumps suitable for pressure boosting, water transfer and agriculture applications.

CONSTRUCTION FEATURES

Robust cast iron suction and delivery housing, stainless steel impellers, diffusers, wearings and pump casing coupled to asynchronous two pole air cooled squirrel cage motor with inbuilt thermal overload protection. The pumps are designed for efficient and dependable performance and a long and trouble free life

PUMPED LIQUIDS: Clean, thin, non-aggressive liquids without solid particles




LIQUID TEMPERATURE: Maximum -20°C to +70°C

ENCLOSURE CLASS: IP54

INSULATION CLASS: F

RPM: 2850

TECHNICAL DATA

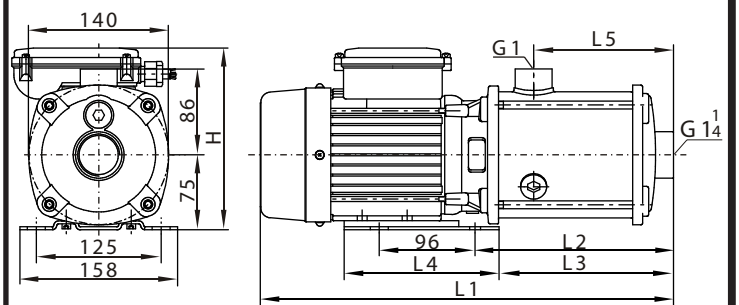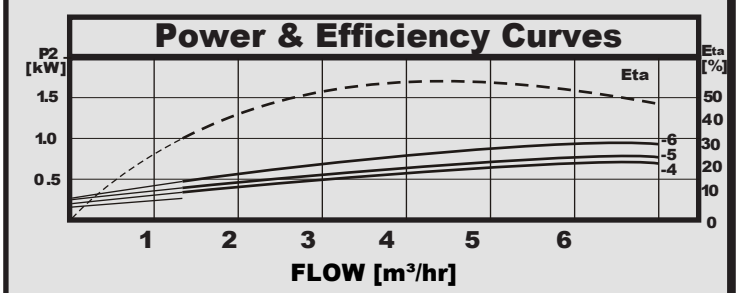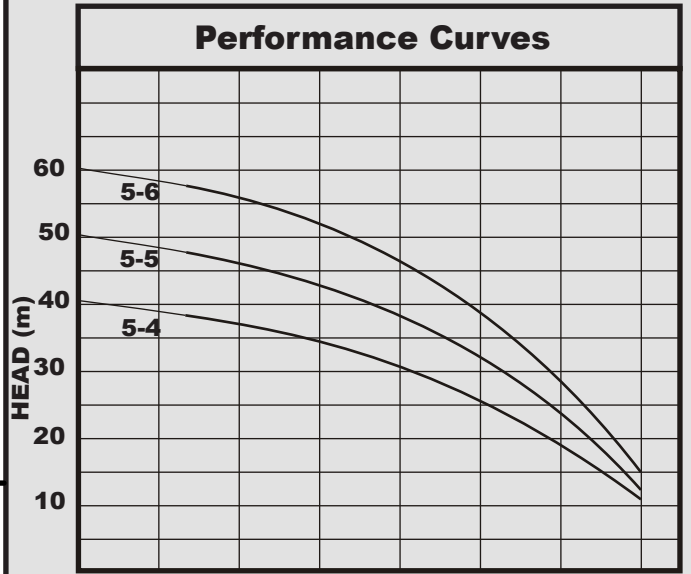

MODEL	kW	VOLTAGE	DIMENSIONS						INLET	OUTLET	WEIGHT (KG)
		SINGLE PHASE	H	L1	L2	L3	L4	L5			
CMI5-4	0.75	240	182	360	145	121	155	86	G1 1/4"	G1"	11.5
CMI5-5	0.75	240	182	378	163	139	155	104	G1 1/4"	G1"	12.5
CMI5-6	1	240	182	414	199	175	155	140	G1 1/4"	G1"	13