


# TAFLO

## HH15

### DOMESTIC IN- LINE BOOSTER PUMP

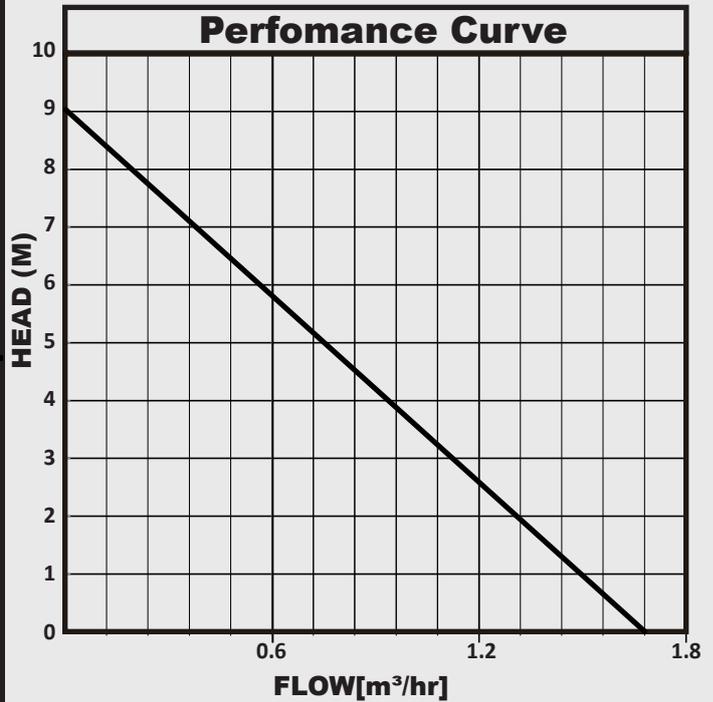

### APPLICATIONS

The TAFLO HH15 is an inline booster pump for pressurizing showers and taps directly. The pump is designed for use in open systems and incorporates a flow switch which starts and stops the pump when a tap is turned on or off making it the ideal solutions for domestic water boosting.

### CONSTRUCTION FEATURES


- Canned motor type i.e pump and motor form integral unit without a shaft seal and with only two ceramic bearing for sealing. The bearings are lubricated by the pumped liquid.
- Pump **MUST** be installed with the shaft in an horizontal position in order to allow for sufficient lubrication.
- Low noise
- Low energy consumption
- Easy installation
- Incorporate an on/off switch
- Male threaded connection

**Pump Liquids:** Clean water, non-corrosive and non-abrasive liquids.

**Max. Ambient Temp:** 40°C

**Liquid Temp:** 0°C - 110°C

### TECHNICAL DATA

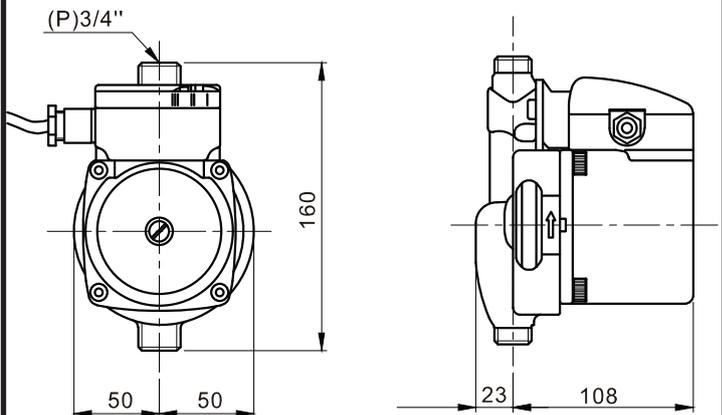

MODEL	VOLTAGE	POWER	CURRENT	MAX HEAD (m)	MAX FLOW (m <sup>3</sup> /hr)	INLET/ OUTLET	WEIGHT (kg)
HH-15-90-160	240V	110W	0.5	9	1.5	3/4"	2.5