


TAFLO

HP4

HORIZONTAL MULTI-STAGE PUMP

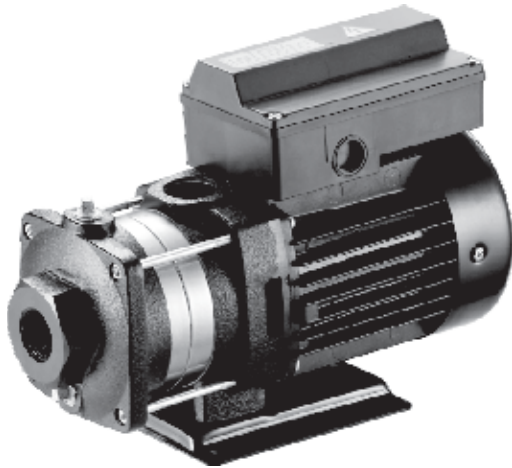

APPLICATIONS

The TAFLO HP range are horizontal design multi-stage pumps suitable for pressure boosting, water transfer and agriculture applications.

CONSTRUCTION FEATURES

Robust cast iron suction and delivery housings, stainless steel impellers, diffusers and wearings coupled to asynchronous two pole air cooled squirrel cage motor with inbuilt thermal overload protection. The pumps are designed for efficient and dependable performance and a long and trouble-free life.

PUMPED LIQUIDS: Clean, thin, non-aggressive liquids without solid particles


LIQUID TEMPERATURE: Maximum 0°C to +90°C

ENCLOSURE CLASS: IP54


INSULATION CLASS: F

RPM: 2850

Performance Curves

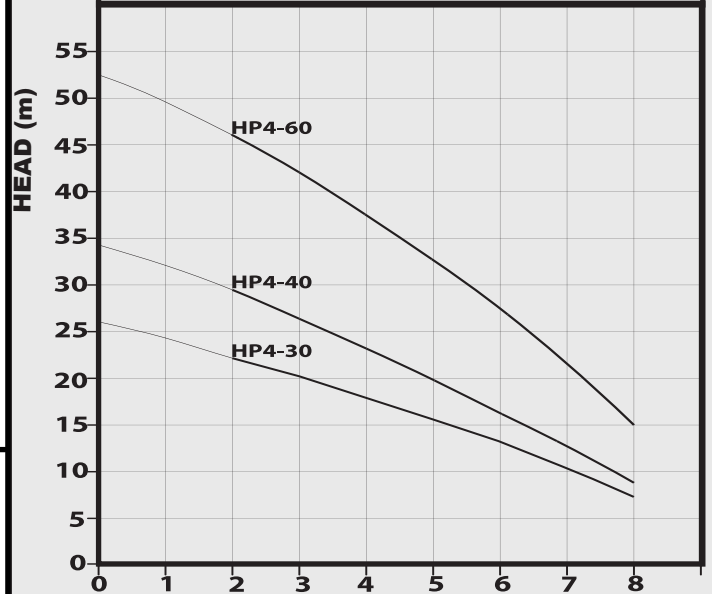

Efficiency and Power curves

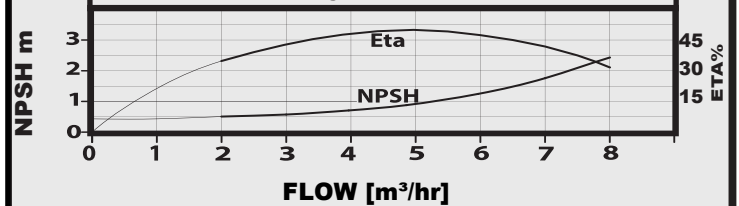

TECHNICAL DATA

MODEL	kW	Voltage	Amps	mm							WEIGHT [kg]
				L1	L2	L3	L4	B1	B2	H	
HP4-30	0.59	240	3.6	344	111	99	137	141	127	228	10.8
HP4-40	0.73	240	4.4	372	138	126	164	141	127	228	11.6
HP4-60	1.1	240	6.7	365	192	180	218	141	127	228	14.8

