



# TAFLO

## JET200N BOOSTER PUMPS

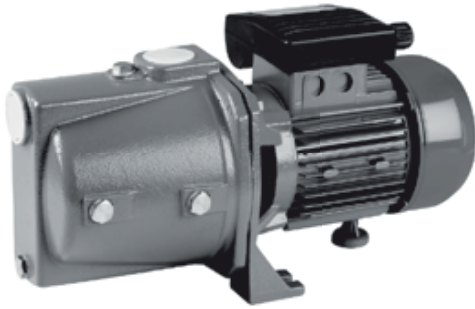

### Performance Curves

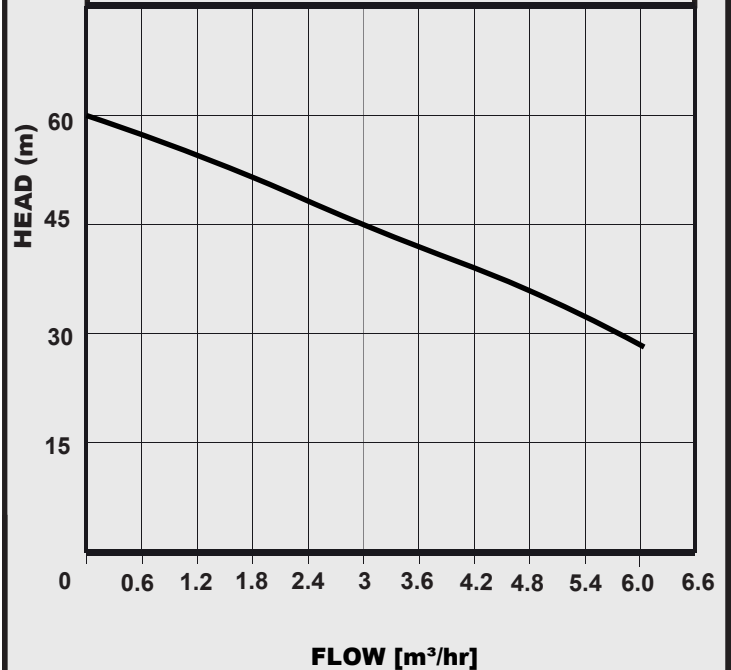

### APPLICATIONS

The TAFLO JET are robust booster pumps with very high hydraulic performance and considerable pressure capacity designed for water transfer and pressure boosting.

### CONSTRUCTION FEATURES

Stainless steel pump casing, plastic impeller, diffuser and venturi tube and graphite/ceramic mechanical seal. Induction motor, closed and cooled with external ventilation built-in thermal & current overload protection.



**Motor Protection:** IP44;

**Liquid quality requirements:** clean free from solids and abrasive substances.

**Temperature:** 0°C to 40°C

**Maximum suction depth:** 8 m at sea level

**Maximum operating pressure:** 4.5bar

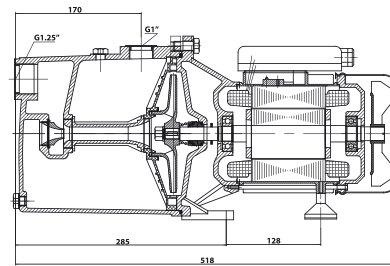

### TECHNICAL DATA

MODEL	VOLTAGE 50Hz	kW	HP	Amps	DNA	DNM	WEIGHT KG
JET200N	240V	2.2	3	10	1 1/4"	1"	38