
TAFLO

CRANE QX

CONSTRUCTION



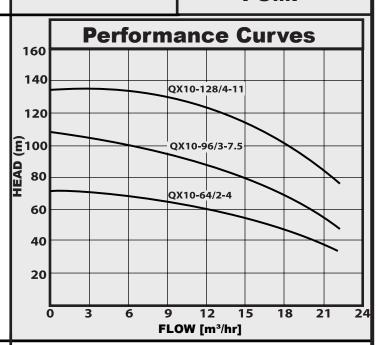

APPLICATIONS

The Crane QX Submersible pumps are multistage high head pumps designed for dewatering in mines, construction sites and also suitable for irrigation and water transfer applications.

CONSTRUCTION FEATURES

- Compact design makes it easy to install
- Heavy duty design to handle slurry and muddy water
- Fitted with lifting hooks for ease of installation

Pumped liquid: Slurry and muddy water contain-


ing sand

Temp: 0°C to 35°C

Max. operating pressure: 14 bar

Max. Immersion depth: 12 m

TECHNICAL DATA

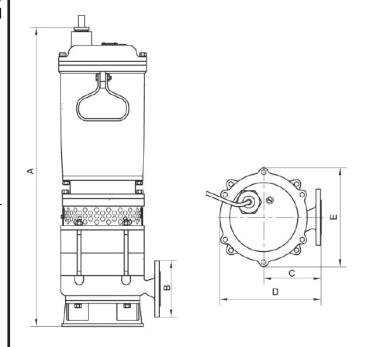

				Dimmensions (mm)						WEIGHT
MODEL	VOLTAGE	kW	HP	Α	В	С	D	E	Outlet	KG
QX10-64/2-4	415V	4	5.5	690	Ф150	155	270	275	2"	75
QX10-96/3-7.5		7.5	10	800		155	270		2"	100
QX10-128/4-11		11	15	1200		160	275		2"	140

