




DRENAG DRAINAGE PUMPS

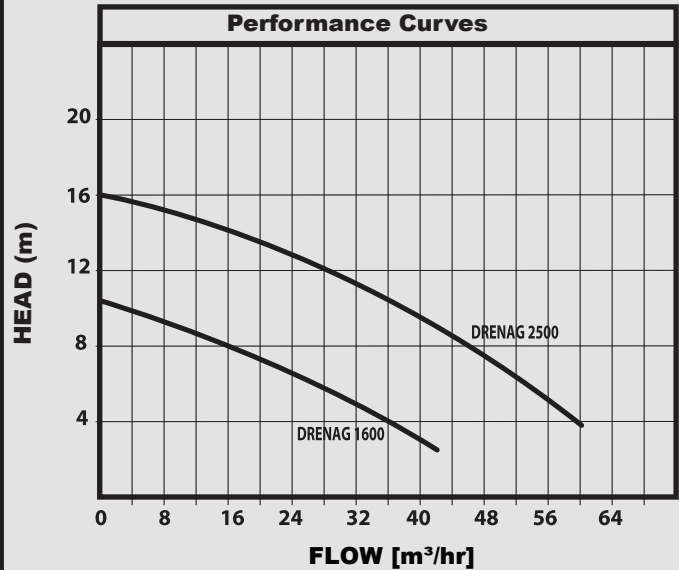

APPLICATIONS

Submersible centrifugal pump with ADJUSTMENT RING impeller suitable for lifting water from drainage waste containing solids having a maximum size of 5mm

CONSTRUCTION FEATURES

Aluminium top cover with built-in handle, impeller in cast iron, pump and motor body in anodized die cast aluminium. Carbon/alumina mechanical seal. Dry type asynchronous sealed motor. Rotor mounted on ball bearings to ensure silent running and long life. Built-in capacitor in the single-phase version

Motor protection: IP68

Insulation class: F


Liquid quality requirements: Clear drain not aggressive water

Liquid temp. range: 0°C to +35°C

Max. immersion depth: 10meters

Installation: in vertical position

Free passage: 25mm

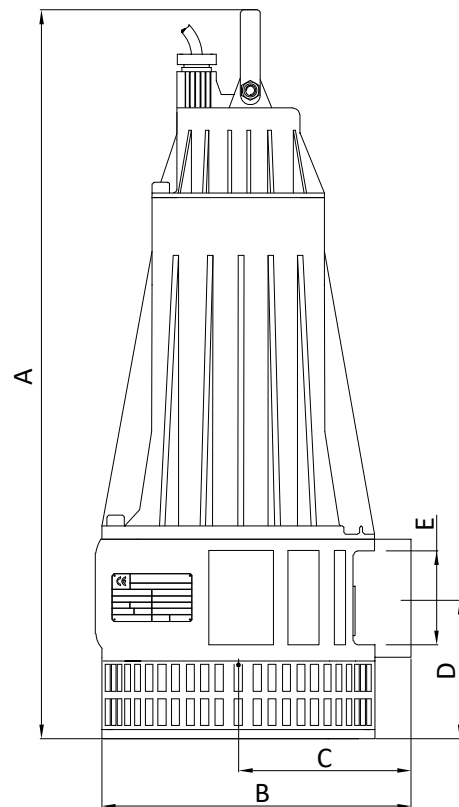

TECHNICAL DATA

MODEL	kW	HP	Amps	A	B	C	D	DNM	WEIGHT KG
DRENAG 1600MA	1.1	1.5	7.4	550	215	112	110	2 1/2"	23.5
DRENAG 2500T	1.8	2.4	5.3						24