


TAFLO

HS

**CONSTRUCTION
PUMP**



Performance Curves

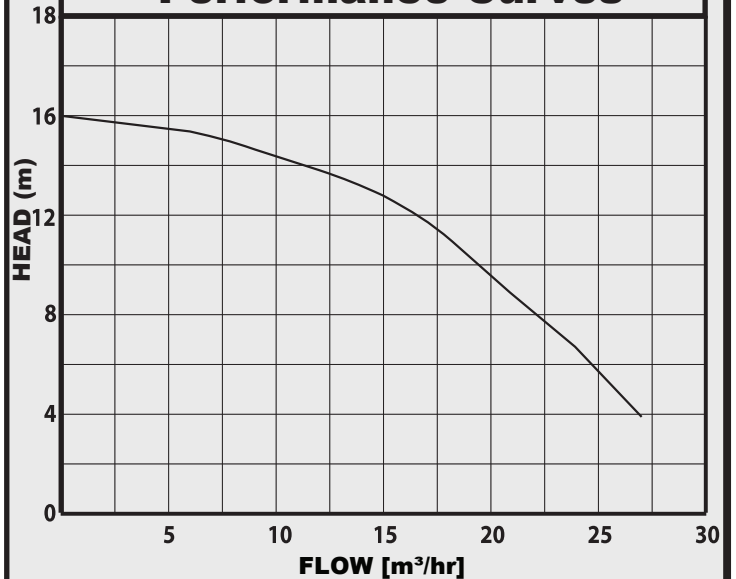

APPLICATIONS

The TAFLO HS pump is a wear resistant submersible pump ideal for pumping dirty water mixed with sand and solids and are ideal for construction sites, storm water and open wells.

CONSTRUCTION FEATURES

- Open Impeller made of PTMG materials
- Anti-corrosion and rust-proof pump body
- Fitted with float switch for automatic level control
- Jacketed motor that maximizes cooling and allows for draining of water upto the bottom of the pump
- Double sided mechanical seal made of carbon and silicon carbide
- Built in thermal overload relay
- Supplied with 10m H07RN-F Submersible cable.

Pumped liquid: Waste water containing sand



Temp: 0°C to 40°C

Max. operating pressure: 1.6 bar

Max. Immersion depth: 7 m

Insulation: B class, IP68 Protection

TECHNICAL DATA

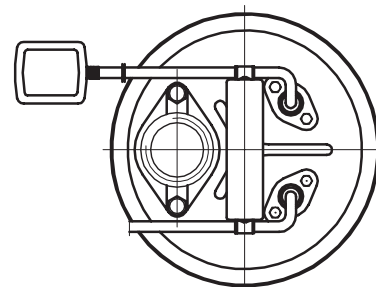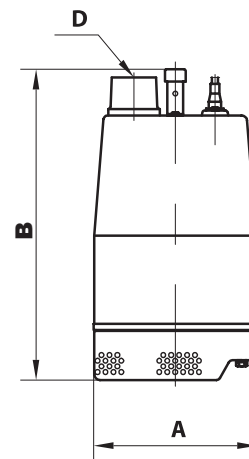

MODEL	VOLTAGE 50Hz	kW	HP	Dimmensions (mm)			WEIGHT KG
				A	B	Outlet	
HS15-12-1.1	240V	1.1	1.5	210	390	1.5"	20