



TAFLO

QDX

DRAINAGE PUMP

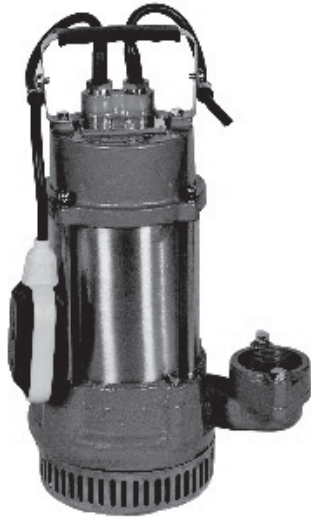

Performance Curves

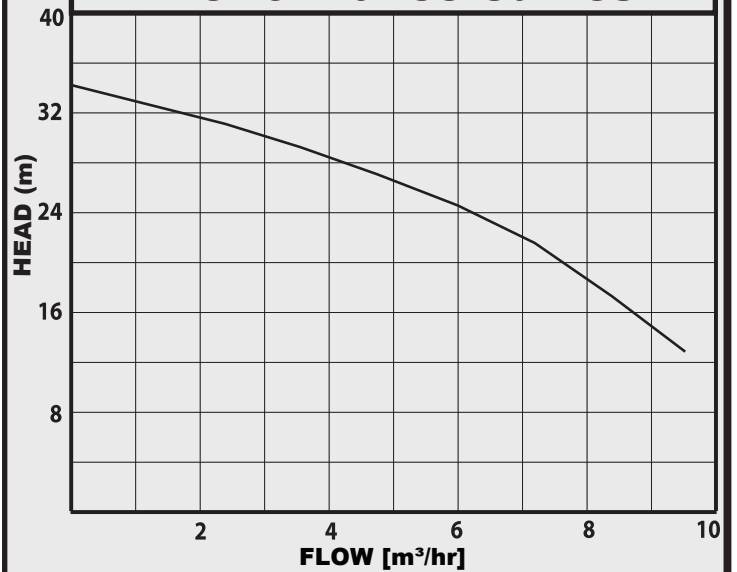

APPLICATIONS

The TAFLO QDX drainage pump is designed for draining, lifting or transfer of clear waste water with maximum diameter of 5mm.

CONSTRUCTION FEATURES

- Closed Impeller made of PPO and fibre glass
- Cast Iron casing and stainless steel AISI304 motor housing
- Fitted with float switch for automatic level control
- Built in thermal overload relay
- Supplied with 10m H07RN-F Submersible cable.



Pumped liquid: Waste water containing particles upto 50mm

Temp: 0°C to 40°C

Max. operating pressure: 1.5 bar

Max. Immersion depth: 7 m

Insulation: B class, IP68 Protection

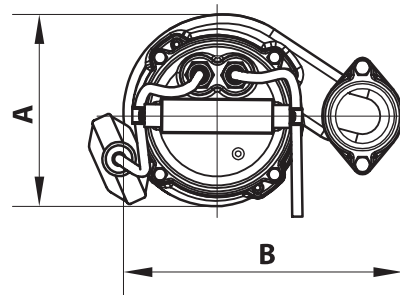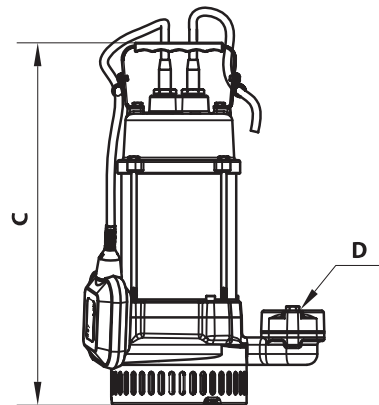

TECHNICAL DATA

MODEL	VOLTAGE	kW	HP	Dimensions (mm)				WEIGHT KG
				A	B	C	Outlet	
QDX1100HF	240V	1.1	1.5	185	260	435	1"	21