

APPLICATIONS

Sololift2 lifting stations are a practical, compact, and ready to install solutions for discharging domestic effluent that cannot reach the main sewage pipe directly. The Sololift2 units grind and evacuate sewage and waste water quickly. Install bathroom facilities without having to cut into concrete foundations - saves time and money. Enables installations of toilets and showers where a natural slope cannot be established. The Sololift2 is ready to install offering easy installation and maintainance.

Wall hung and freestanding models cater to every space

CONSTRUCTION

Maximum liquid temperature: 50°C (90°C Sololift2 C-3 (30min))

Unique, welded, pressure tight tank to ensure safety and reliability particularly in high pressure grey water applications

Smart adjustable inlet connectors allow movement of upto 10mm, both vertically and horizontally for easy fitting to existing pipes

1.2 metre cable with plug

FEATURES AND BENEFITS


The most powerful, reliable and service friendly lifting station on the market

Lift out motor and pump unit for clean and easy service and maintainance - no mess


Captive screw fastening, external pressure switch and tank draining enable fast and clean repairs and service



Sololift 2 WC-1 for single toilet

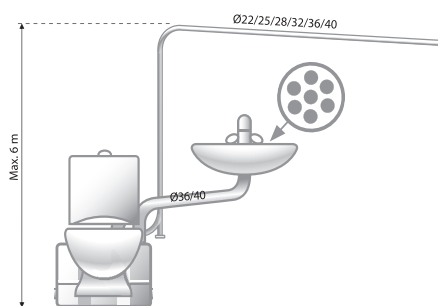

Sololift 2 WC-3 for toilet, sink and shower

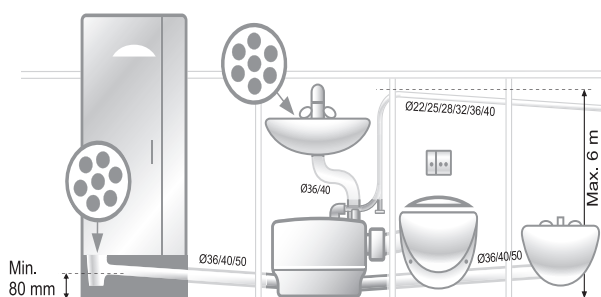

TECHINICAL DATA

Pumps	Diameter (mm)		Power (W)	Dimensions (mm)			l/min	30	45	55	60
	Discharge	Inlet (connections)		H	L	W					
Sololift2 WC-1	22/25/28/32/36/40	1 x 32/36/40	620	347	453	176		8	7.2	5.8	3.5
Sololift2 WC-3	22/25/28/32/36/40	1 x 32/36/40 2 x 36/40/50	620	347	453	176		8	7.2	5.8	3.5
Sololift2 CWC-3	22/25/28/32/36/40	1 x 32/36/40 2 x 36/40/50	620	368	495	164	m Head	8	6.8	5.0	2.5
Sololift2 C-3	22/25/28/32/36/40	1 x 32/36/40 2 x 36/40/50	640	255	373	158		8	7.2	6	5.4
Sololift2 D-2	22/25/28/32/36/40	2 x 32/36/40	280	147	299	165		8	3.38	1.98	-