


TAFLO

WQBS

DRAINAGE PUMP



Performance Curves

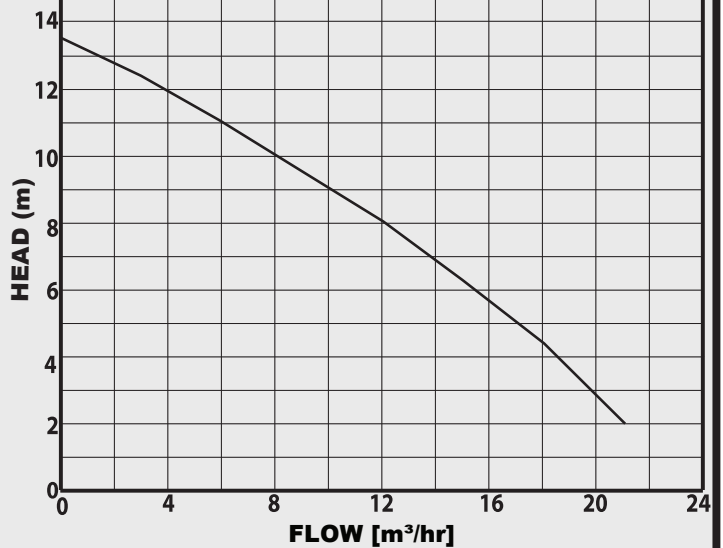

APPLICATIONS

The TAFLO WQBS drainage pump is designed for draining, lifting or transfer of clear waste water with maximum diameter of 50mm

CONSTRUCTION FEATURES

- Vortex Impeller made of stainless steel AISI304
- Anti-corrosion and rust-proof stainless steel pump body
- Fitted with float switch for automatic level control
- Jacketed motor that maximizes cooling and allows for draining of water upto the bottom of the pump
- Built in thermal overload relay
- Supplied with 10m H07RN-F Submersible cable.



Pumped liquid: Waste water containing particles upto 50mm

Temp: 0°C to 40°C

Max. operating pressure: 1.5 bar

Max. Immersion depth: 7 m

Insulation: B class, IP68 Protection

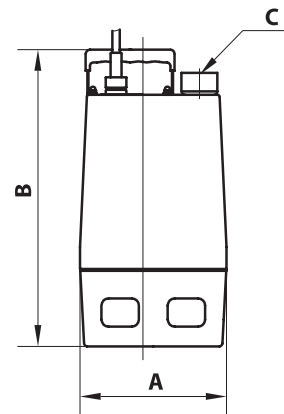

TECHNICAL DATA

| MODEL | VOLTAGE | kW | HP | Dimensions (mm) | | | WEIGHT KG |
|-------|---------|-----|-----|-----------------|-----|--------|--------------|
| | | | | A | B | Outlet | |
| WQBS | 240V | 1.1 | 1.5 | 220 | 430 | 1.5" | 18 |