


TAFLO

WSD

SEWAGE PUMPS

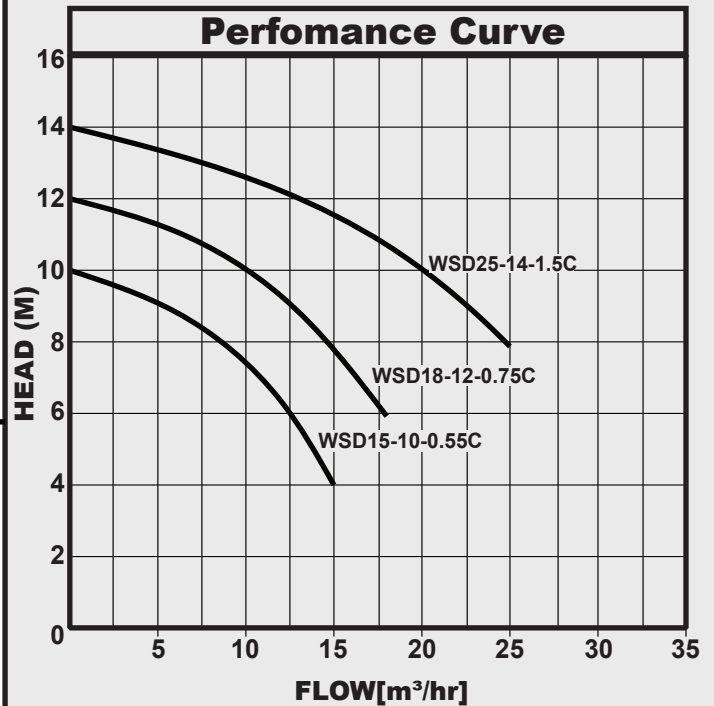

APPLICATIONS

The TAFLO WSD range are submersible pumps designed for pumping sewage and waste water containing solids of upto 50mm.

CONSTRUCTION FEATURES

- Unshrouded open impeller for free passage of particles
- Designed for continuous duty
- Fitted with float switch for automatic level control
- Built in thermal overload relay
- Fitted with 8m cable.


Pumped liquid: Sewage and waste water containing particles upto 50mm

Temp: 0°C to 40°C

Max. operating pressure: 1.6 bar

Max. Immersion depth: 10 m

Insulation: B class, IP68 Protection

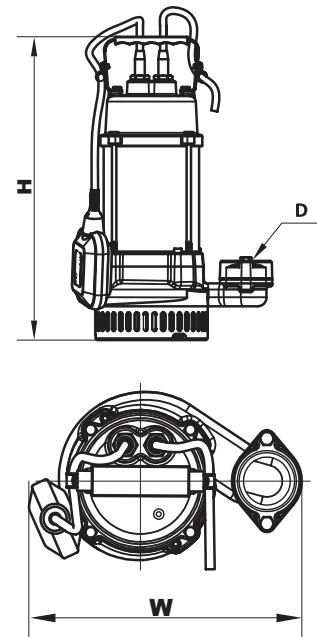

TECHNICAL DATA

MODEL	VOLTAGE	kW	HP	DIMENSIONS(mm)		Outlet	WEIGHT (kg)
				H	W		
WSD15-10-0.55C	240	0.55	0.75	430	240	2"	14.5
WSD18-12-0.75C	240	0.75	1	450	250	2"	18.7
WSD25-14-1.5C	240	1.5	2	480	280	2"	20