




DP20HCl/DP30HCl



DPW30-Waste water

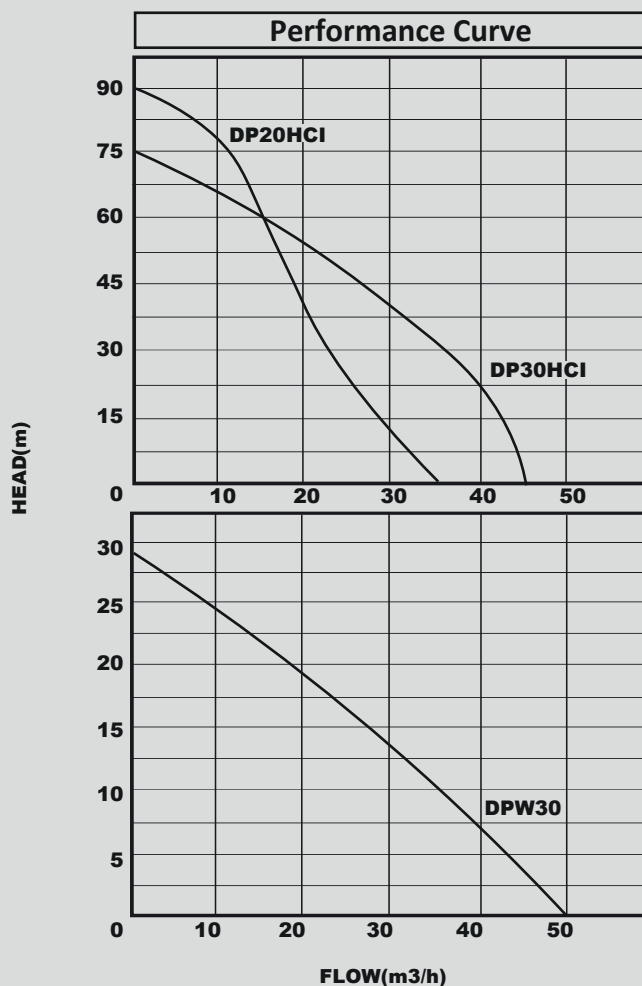

APPLICATION

TAFLO DP range of Engine pumps are superior quality self priming diesel engine driven pumps designed for water transfer, irrigation and fire fighting.

The DPW30 model is designed for pumping waste water containing particles. They are fitted with a frame which makes them sturdy and robust and the engines are designed for long hours of operation. Pump housing and impeller for the DPW model are made of high quality Alluminium for corrosion resistance and cast iron for the DP range

TECHNICAL DATA

Model	DP20HCl	DP30HCl	DPW30
Max Flow Rate (m3/h)	35	47	50
Head (m)	90	75	28
Suction (m)	8	8	-
Outlet size (inches)	2	3	3
Inlet size(inches)	2	3	3
Speed (rpm)	3600	3600	3600
Engine model	178FA	186FA	178F
Maximum output power (HP)	6	7.7	6
Fuel tank capacity (L)	5.5	5.5	3.5
Dimensions(mm)	L	645	580
	W	475	450
	H	605	580
Net Weight(kg)	80	85	56