



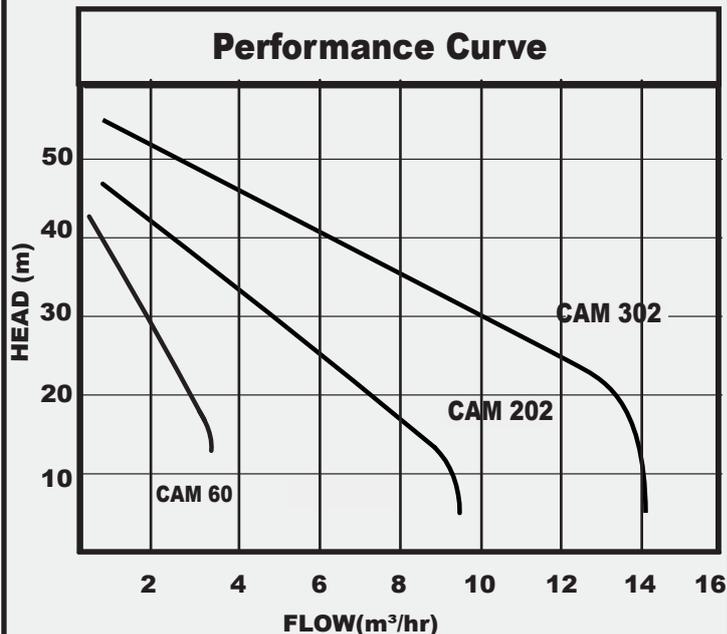

**CAM Series**

**CENTRIFUGAL PUMPS**

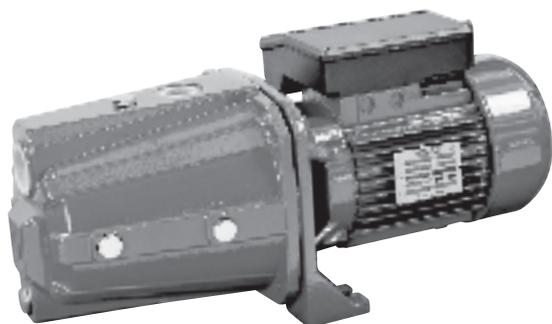

**APPLICATIONS**

Self priming centrifugal JET pumps with excellent suction capability even when there are air bubbles in the water. Used especially for supplying water to domestic installations. Ideal for use in small-scale agriculture and gardening or wherever self-priming operation is necessary.

**CONSTRUCTION FEATURES**

Cast Iron pump body and technopolymer, stainless steel disc cover and pressure disc, die-cast aluminium motor support, technopolymer impeller, diffuser, ventri tube and carbon/ceramic mechanical seal, induction motor, closed and cooled with external ventillation, built-in thermal and current overload protection.

**Motor Protection:** IP44


**Terminal box Protection:** IP55

**Insulation Class:** F

**Liquid Quality:** Clean, free of solids or abbrasive substances, non-viscous, non-aggressive, non-crystaized, chemically neutral,close to the characteristics of water.

**Temperature:** 0°C to 40°C

**Maximum Operating Pressure:** 5 bar

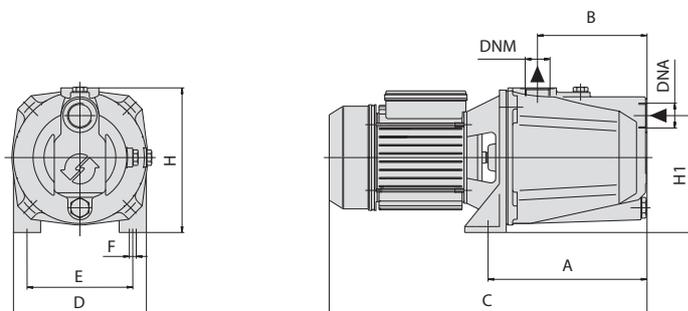

**TECHNICAL DATA**

MODEL	POWER RATING			DIMENSIONS(MM)								INLET DNA	OUTLET DNM	WEIGHT KG
	Type	kW	HP	VOLTAGE	A	B	C	D	E	F	H			
CAM 60	0.6	0.8	240	162	90	352	176	140	9	210	150	1"	1"	10.1
CAM202	1.5	2		284	153	505	206	145	12	217	170	1" 4	1"	28.6
CAM302	2.2	3		290	174	570	225	166	12	230	183	1" 2	1" 4	30