



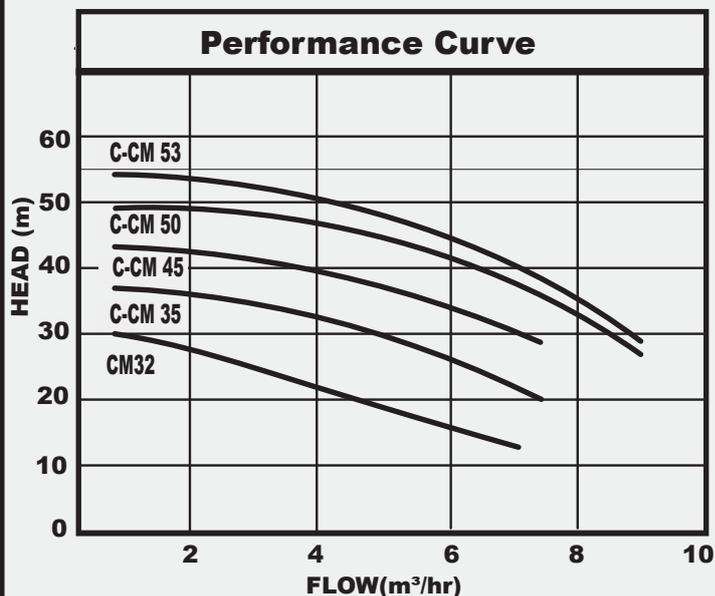

C Series

CENTRIFUGAL PUMPS

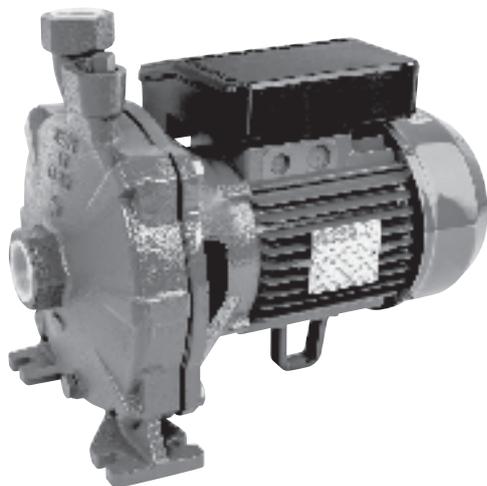

APPLICATIONS

Single impeller centrifugal pumps are suitable for domestic, civil, industrial and agricultural installations.

CONSTRUCTION FEATURES


Cast Iron pump body and motor support, Technopolymer or castiron impeller and Carbon/Ceramic mechanical seal Induction motor, closed and cooled with external ventilation, built in thermal and current overload protection.

Motor Protection: IP44

Terminal box Protection: IP55

Insulation Class: F

Liquid Quality: Clean, free of solids or abrasive substances, non-viscous, non-aggressive, non-crystallized, chemically neutral, close to the characteristics of water.

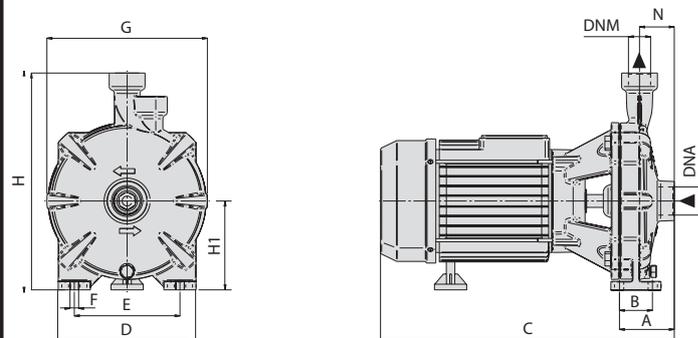

TECHNICAL DATA

MODEL	POWER RATING			DIMENSIONS(MM)										INLET DNA	OUTLET DNM	WEIGHT KG
	Type	kW	HP	VOLTAGE	A	B	C	D	E	F	G	H	H1			
CM 32	0.75	1	240	108	98	300	176	140	9	186	229	94	50	1"	1"	14.8
CM 35	1.1	1.5	240	76,5	45	355	220	147,5	12	224	305	125	48,5	1" 1/4	1"	23.4
CM 45	1.5	2	240	76,5	45	355	224	147,5	12	224	305	125	48,5	1" 1/4	1"	24.4
CM 50	1.85	2.5	240	76,5	45	410	224	147,5	12	224	305	125	48,5	1" 1/4	1"	27.1
CM 53	2.2	3	240	76,5	45	410	220	147,5	12	224	305	125	48,5	1" 1/4	1"	30.6