




### Performance Curves

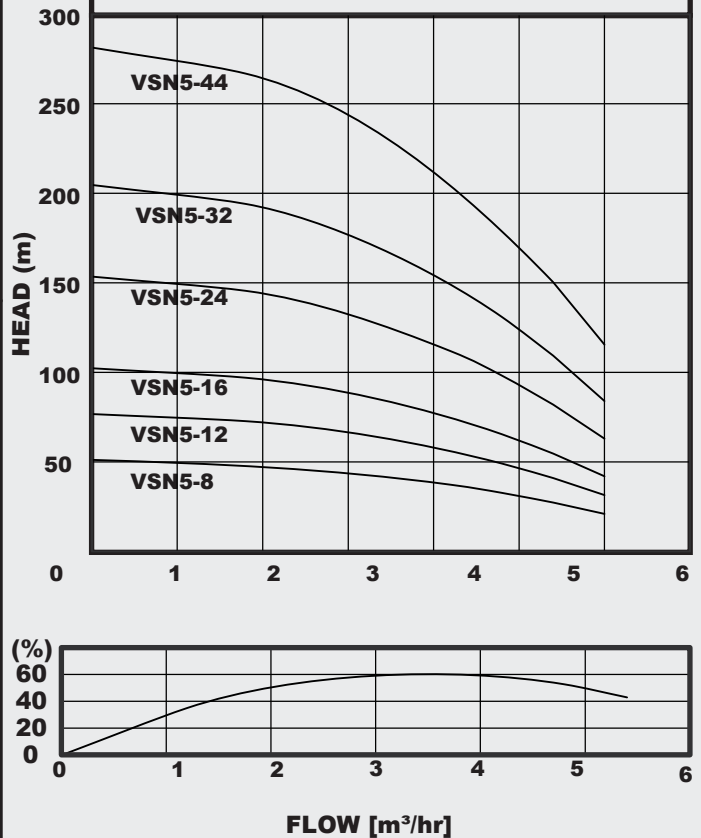

### APPLICATIONS

VANSAN VSN pumps are robust submersible electric pumps capable of generating a broad range of flow rates and heads suitable for borehole installations

### CONSTRUCTION FEATURES

Multi-stage centrifugal pump directly coupled to a submersible asynchronous two pole motor made of AISI 304 stainless steel, for parts in contact with water. Pump-end incorporates technopolymer impellers with stainless steel wear parts, functioning on floating clearance rings made of synthetic low abrasion material with technopolymer diffusers that impart significant wear resistance to the pump. Pump liner, shaft and coupling filter and cable cover in stainless steel. Base support and head in microcast AISI 304 stainless steel with steel check valve incorporated in the delivery chamber

**Protection Rating:** IP68


**Heat Insulation Class:** F

**Liquid Temperature Range:** from 0°C to +40°C

**Liquid Quality Requirements:** Clean, free of solids or abrasive contaminants and chemically neutral

**Max. Permissible Sand Quantity:** 150g/m<sup>3</sup>

**Max. immersion depth below water:** 250m

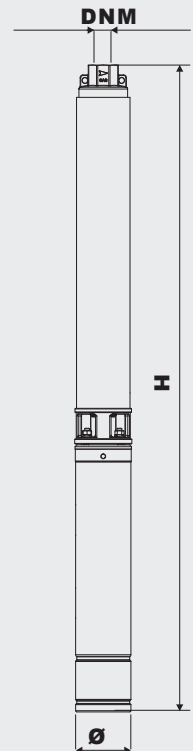

### TECHNICAL DATA

Model	Motor Type	Power [kW]	Full Load Current (A)		Outlet	Ø [mm]	Height [mm]	Weight [kg]
			1 x 240V	3 x 415V				
VSN 5/8	4"	0.75	8.5	-	1 1/4"	98	749	13.8
VSN 5/12		1.1	10.8	4.6			878	16.5
VSN 5/16		1.5	15	6			1018	18.9
VSN 5/24		2.2	-	7.5			1384	25.9
VSN 5/32		3	-	9.6			1543	26.3
VSN 5/44		4	-	13.1			1947	32.4